

430HK2/420HK2

The Panasonic Advantage



**Higher Module Efficiency**

Superior module efficiency of 22.2% and 21.7%, respectively, allows maximum power production with less roof space. Offering clean aesthetics and one of the industry’s lowest annual degradation rates, power output of at least 92% is guaranteed after 25 years.



**EVERVOLT AllGuard, AllGuard and TripleGuard 25-Year Warranty**

A long-term warranty is only as reliable as the company behind it. EVERVOLT AllGuard, AllGuard and TripleGuard 25-year warranties cover EVERVOLT® panels for performance, product, parts and labor<sup>1</sup> for 25 years. Whether in year three or year 25, your Panasonic warranty will be there when you need it.



**High Efficiency in High Temperatures**

Produce more energy throughout the day even on the hottest days in the warmest climates. EVERVOLT® solar panels outperform others when temperatures rise due to our industry-leading 0.24%/°C temperature coefficient.



**Heterojunction Cell Technology with Gapless Connections**

Half-cut cells with heterojunction technology with gapcell connections minimizes electron loss, maximizes conversion efficiency, and produces considerably higher power output over conventional panels.



**Durability & Quality Assurance**

N-type cells result in minimal Low Induced degradation (LID) and Potential Induced degradation (PID), which supports reliability and longevity. As a solar pioneer for over 40 years, Panasonic EVERVOLT solar panels are backed by innovation, experience and a brand you can trust.



**Improved Performance When Shaded**

Continuous power production in shaded areas for greater energy yields and output. More sunlight absorption means more clean power to your home.



## 430HK2/420HK2

### ELECTRICAL SPECIFICATIONS

| Model                           | EVPV430HK2             | EVPV420HK2             |
|---------------------------------|------------------------|------------------------|
| Rated Power (Pmax) <sup>1</sup> | 430W                   | 420W                   |
| Maximum Power Voltage (Vpm)     | 42.8V                  | 42.2V                  |
| Maximum Power Current (Ipm)     | 10.05A                 | 9.96A                  |
| Open Circuit Voltage (Voc)      | 49.3V                  | 49.1V                  |
| Short Circuit Current (Isc)     | 10.81A                 | 10.74A                 |
| Temperature Coefficient (Pmax)  | -0.24%/°C              |                        |
| Temperature Coefficient (Voc)   | -0.24 %/°C             |                        |
| Temperature Coefficient (Isc)   | 0.04 %/°C              |                        |
| NOCT                            | 44°C (±2°C)            |                        |
| CEC PTC Rating                  | 413.1W                 | 403.3W                 |
| Module Efficiency               | 22.2%                  | 21.7%                  |
| Power Density                   | 20.6 W/ft <sup>2</sup> | 20.2 W/ft <sup>2</sup> |
| Maximum System Voltage          | 1000V                  |                        |
| Maximum Series Fuse             | 25 A                   |                        |
| Watt Class Sorting              | -0/+10W                |                        |

### MECHANICAL SPECIFICATIONS

|                                     |  |
|-------------------------------------|--|
| Connector Type                      | Stäubli MC4 PV-KBT4/KST4 (4 mm <sup>2</sup> )  |
| Cable Size / Type                   | 12AWG(4mm <sup>2</sup> ) PV Wire, 49.2+49.2 in |
| Max Snow Load (+) <sup>2</sup>      | 146 psf (7000 Pa)*                             |
| Max Wind Load (-) <sup>2</sup>      | 83.5 psf (4000 Pa)*                            |
| Dimensions LxWxH                    | 73.4 x 40.9 x 1.2 in (1865 x 1040 x 30 mm)     |
| Weight                              | 47.6 lbs (21.6kg)                              |
| Pallet Dimensions LxWxH             | 75.2 x 42.9 x 47.5 (1910 x 1090 x 1205 mm)     |
| Quantity per Pallet / Pallet Weight | 33pcs/1660 lbs. [753 kg]                       |
| Quantity per 40' Container          | 792pcs   |

\*Test Load. Design Load should be multiplied by two thirds.

### OPERATING CONDITIONS AND SAFETY RATINGS

|                         |  |
|-------------------------|--|
| Certifications          | UL 61730   |
|                         | IEC61215:2021 [Hailstone 35mm]                               |
|                         | Fire Type 2 [UL 61730]                                       |
|                         | Salt Mist [IEC 61701]  |
|                         | PID [IEC 62804]  |
|                         | Ammonia Resistance [IEC 62716]                               |
| Operating Temperature   | Lead-free acc. to RoHS EU 863/2015 [IEC 62321]               |
|                         | -40°F to 185°F (-40°C to 85°C)                               |
| Limited Warranty        | 25' Yrs Workmanship and Power Output (Linear) <sup>***</sup> |
| Power Output in Year 1  | 98%  |
| Annual Degradation      | 0.25%  |
| Power Output in Year 25 | 92%  |

NOTE: Values at standard test conditions(STC: air mass AM1.5 irradiance 1000W/m<sup>2</sup>, temperature 25°C).


<sup>1</sup> Maximum power at delivery. For guarantee conditions, please check our guarantee document.

<sup>2</sup> Equipment must be installed by a Panasonic Authorized, Premium, or Elite installer for the twenty-five (25) year Limited Labor Warranty included in the EVERVOLT AllGuard, AllGuard and TripleGuard warranty too apply.


<sup>3</sup> Refer to installation manual for detailed mechanical loading information

<sup>\*\*\*</sup> 1st year 98%, after 2nd year 0.25% annual degradation to year 25.


### PERFORMANCE WARRANTY

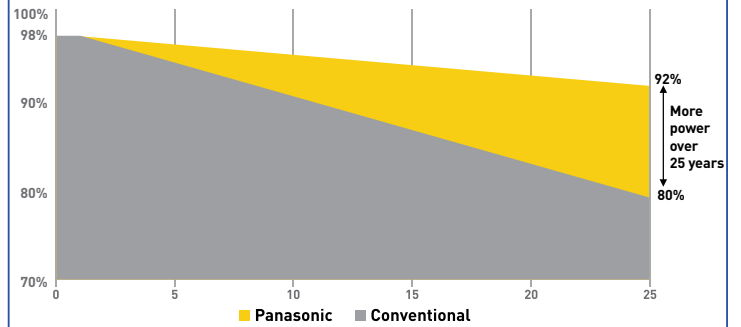

### DIMENSIONS

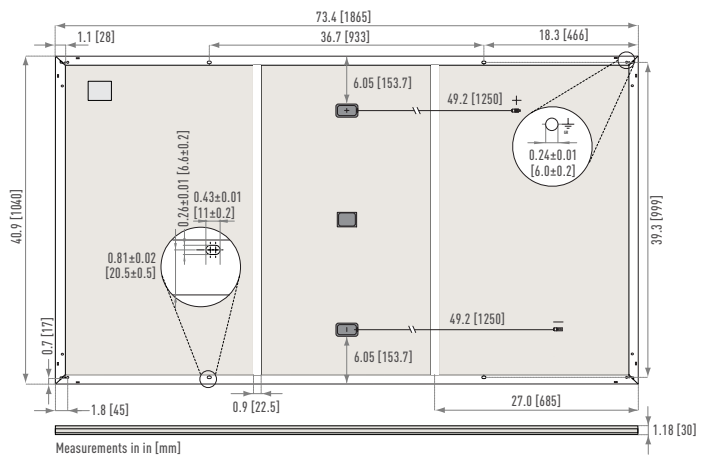

### DEPENDENCE ON IRRADIANCE

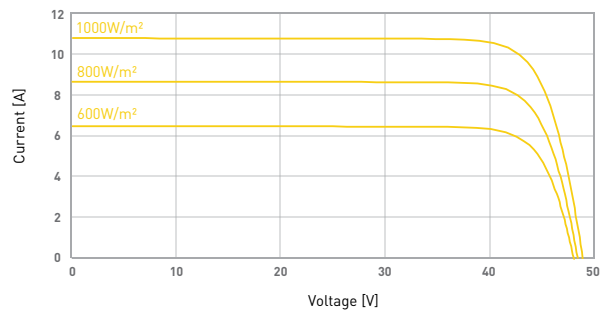

Reference data for model : EVPV430HK2  
Cell temperature : 77°F (25°C)



NOTE: Specifications and information above may change without notice.

**CAUTION!** Please read the installation manual carefully before using the products.

Used electrical and electronic products must not be mixed with general household waste. For proper treatment, recovery and recycling of old products, please take them to applicable collection points in accordance with your national legislation.